




Work instruction

Product Line: Drs 25	Date: 12-1-10
Category: Wago Modbus Flash	Distribution: WEB ☒ Work Instruction ☒



1. Open small access door on main Wago unit.
2. Set small dipswitch under access door to the downward position, as shown, for programming.
3. Set ID pots for 0

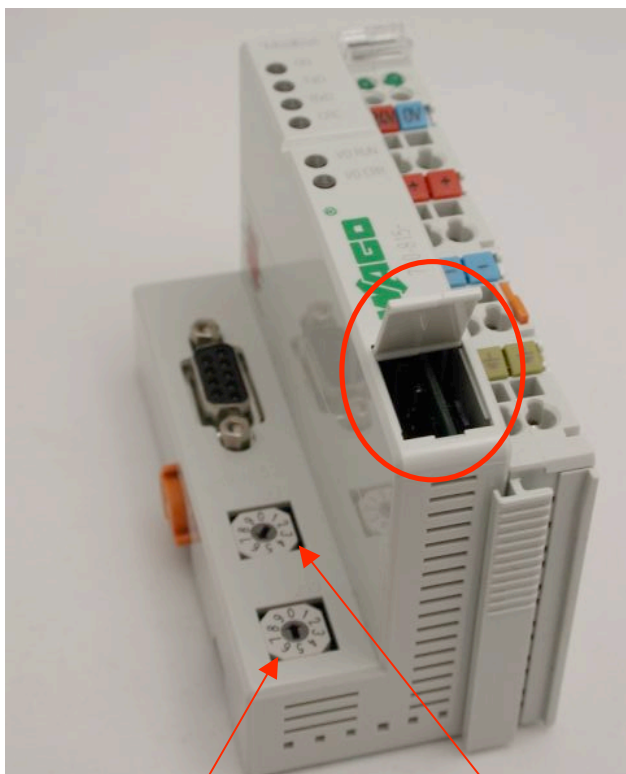


Lower ID pot

Upper ID pot


4. Install Wago I/O Cable between the main Wago unit and the serial port on the back of the computer.

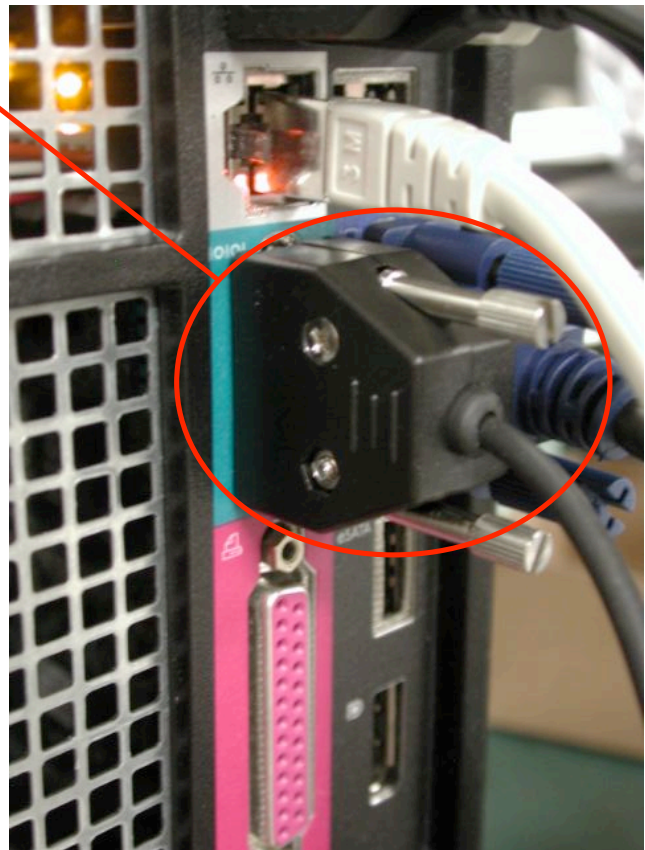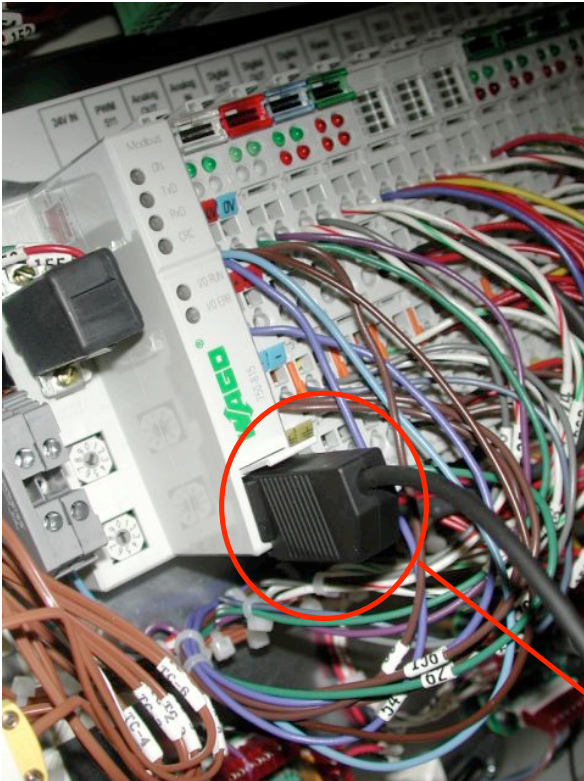

5. Power up DRS25.
6. Go to Start, Programs, Wago I/O Pro 32
7. Go to File, Open then Browse To Support, Wago, Sample Programs, Baud Rate Setup Pro if prompted to save changes select No
8. Open Wago-10-Pro32V2

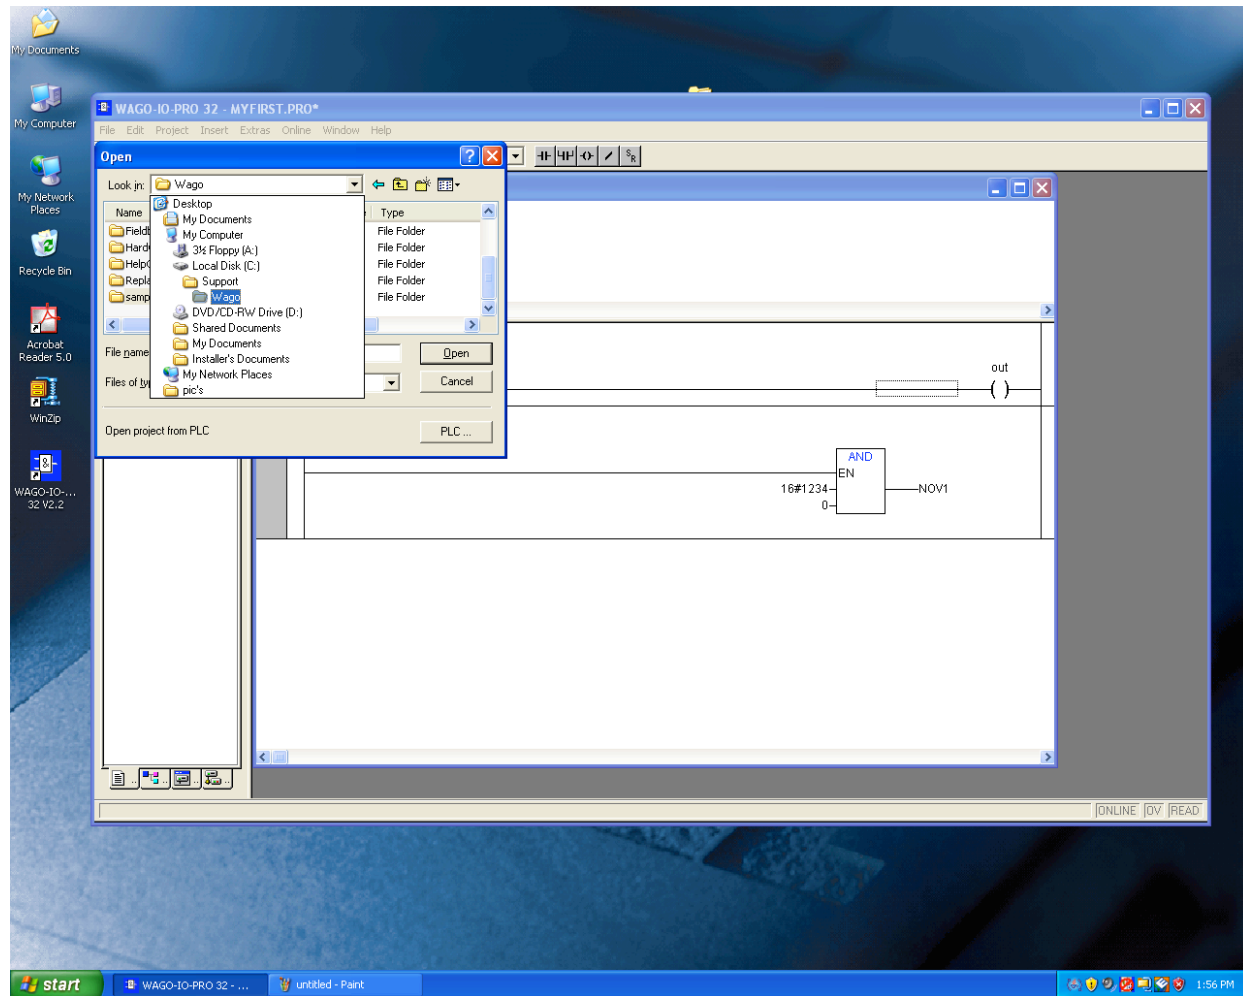

9. Go to online in the tool bar select Log In – if a No Program notice appears, select Yes

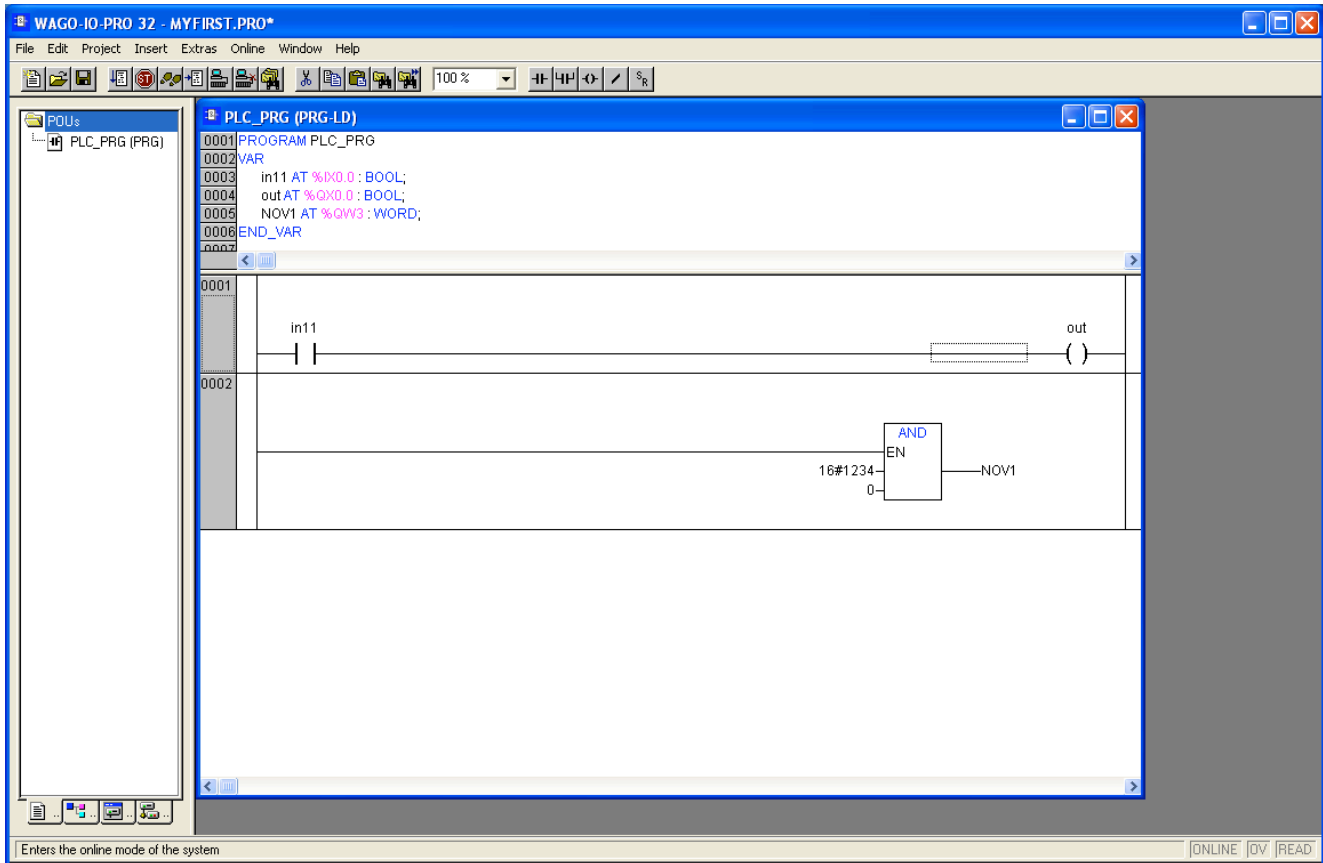

10. Go to online then run; go to online and flash. Observe brief flicker from red CRC LED on Wago Unit. Exit Wago Software.

11. Power down, reset ID pots to 0 lower and 6 top.

12. Remove Wago cable and store properly.

13. Re-set the dip switch on the Wago unit to the upper most position.